




● **Outer dimensions (mm)**

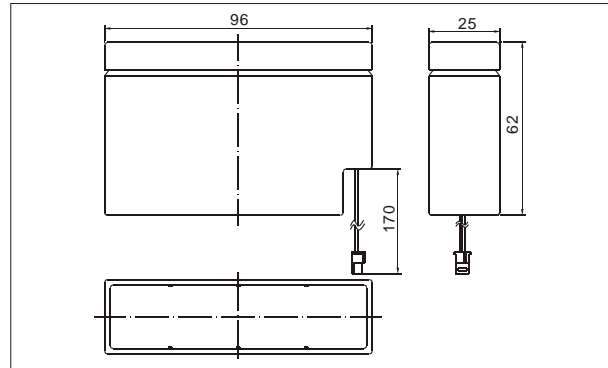

The CHIWAY sealed lead-acid rechargeable battery (VRLA battery) is leak-proof and maintenance free. The Superiority of VRLA battery is derived from its uniquely efficient oxygen recombination technology. The oxygen evolved from the positive plates diffuses through the micro porous glass fiber mat to the negative plates where it is changed back to water by recombination reaction, eliminating the need for water addition. The result is a maintenance free battery.

● **Battery Construction**

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Plug	Fiberglass	Sulfuric acid

● **General Features**

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

● **Application**

- Alarm System
- Medical Equipment
- Cable Television
- Control Equipment
- UPS
- Communication Equipment
- Toys
- Emergency power System
- Power Tools
- Security System

● **Specifications**


Nominal Voltage		12V
Capacity (20 hr 25°C)		0.8Ah
Design Life		3-5 Years
Dimensions	Length	96mm (3.78 inch)
	Width	25mm (0.98 inch)
	Height	62 mm (2.44 inch)
	Total Height	62mm (2.44 inch)
Approx. Weight		0.34 Kg (0.75 lbs)
Capacity 25°C (77°F)	20 hr rate	0.8Ah
	10 hr rate	0.744Ah
	5 hr rate	0.68Ah
	1 hr rate	0.48Ah
Internal Resistance (Full charged Battery at 25°C (77°F))		250m Ω

Capacity affected by Temperature (20hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge at 25°C	3 month	Remaining capacity: 91%
	6 month	Remaining capacity: 82%
	12 month	Remaining capacity: 65%
Normal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range		-15°C ~ 50°C (5 ~ 122°F)
Float charging voltage (25°C)		13.6 to 13.8V
Cyclic charging voltage (25°C)		14.5 to 14.9V
Maximum charging current		0.32A
Terminal material		Plug
Maximum Discharge current		12A (5sec)

Charge characteristic Curve for standby use



Discharge characteristic Curve

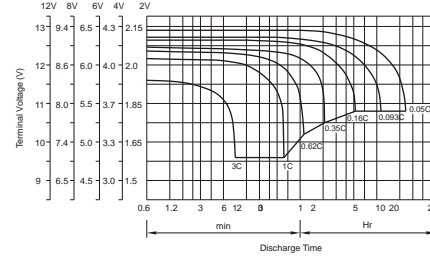

Relationship between charging voltage and temperature



Self-discharge characteristic




Temperature effects on float life



Temperature effects on capacity



Life characteristics of Standby use

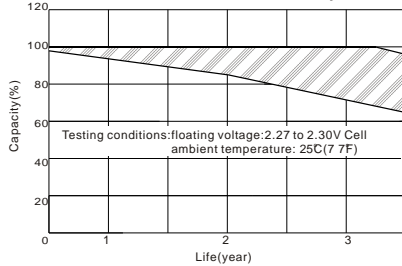

Cycle service life in relation to depth of discharge



F.V/Time	Constant Current Discharge Characteristics (Amperes, 25°C)								Constant Power Discharge Characteristics (Watts, 25°C)							
	5min	10min	30min	1h	3h	5h	10h	20h	5min	10min	30min	1h	3h	5h	10h	20h
10.80V	2.01	1.91	0.88	0.50	0.21	0.14	0.08	0.04	25.37	16.80	7.13	4.32	2.28	1.51	0.85	0.46
10.50V	2.24	2.00	0.90	0.51	0.21	0.14	0.08	0.04	27.36	18.07	7.61	4.56	2.35	1.56	0.87	0.47
10.20V	2.56	2.03	0.93	0.53	0.22	0.15	0.08	0.04	29.45	19.33	8.11	4.80	2.40	1.63	0.87	0.47
9.60V	2.81	2.13	0.97	0.55	0.22	0.15	0.08	0.04	33.60	21.89	9.00	5.28	2.52	1.68	0.87	0.47

Packing Dimensions	319*290*88mm	Quantity Per Box	20 pcs	Net weight Per Box	6.8kg	Gross weight Per Box	7.3 kg
Splint	Europe (1200*800mm)		Australia (1150*1100mm)		Standard (1100*950mm)		Nonstandard (950*900mm)
20'DRY 8.5'	47.52k		46.8k		46.8k		48.96k



SHENZHEN CHIWAY BATTERY CO., LTD.

Jingyi Industrial Zone, NO.528 Jinbi Road, Pingshan Town, Longgang District, Shenzhen, China.
Tel: (+86-755) 8993 0038 8993 1028 Fax: (+86-755)8993 0306 E-mail : sales@chiway-battery.com

www.chiway-battery.com