




● Outer dimensions (mm)



The CHIWAY sealed lead-acid rechargeable battery (VRLA battery) is leak-proof and maintenance free. The Superiority of VRLA battery is derived from its uniquely efficient oxygen recombination technology. The oxygen evolved from the positive plates diffuses through the micro porous glassfiber mat to the negative plates where it is changed back to water by recombination reaction, eliminating the need for water addition .The result is a maintenance free battery.

● Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Plug	Fiberglass	Sulfuric acid

● General Features

- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead , calcium tin alloy grid for high power density.
- Long service life , float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

● Application

- Alarm System
- Medical Equipment
- Cable Television
- Control Equipment
- UPS
- Communication Equipment
- Toys
- Emergency power System
- Power Tools
- Security System

● Specifications


Nominal Voltage		6V
Capacity (20 hr 25°C)		12 Ah
Design Life		3-5 Years
Dimensions	Length	108mm (4.25inch)
	Width	71mm (2.80 inch)
	Height	140 mm (5.51inch)
	Total Height	140mm (5.51 inch)
Approx.Weight		2.1 Kg (4.63 lbs)
Capacity 25°C(77°F)	20 hr rate	12Ah
	10 hr rate	11.16Ah
	5 hr rate	10.2Ah
	1 hr rate	7.2Ah
Internal Resistance (Full charged Battery at 25°C(77°F)		10m Ω

Capacity affected by Temperature (20hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge at 25°C	3 month	Remaining capacity: 91%
	6 month	Remaining capacity: 82%
	12 month	Remaining capacity: 65%
Normal operating temperature		25°C ±3°C(77°F ±5°F)
Operating temperature range		-15°C~50°C(5~122°F)
Float charging voltage(25°C)		6.80 to 6.90V
Cyclic charging voltage(25°C)		7.25 to 7.45V
Maximum charging current		4.8A
Terminal material		Copper
Maximum Discharge current		180A(5sec)

**Charge characteristic Curve for standby use**



**Discharge characteristic Curve**

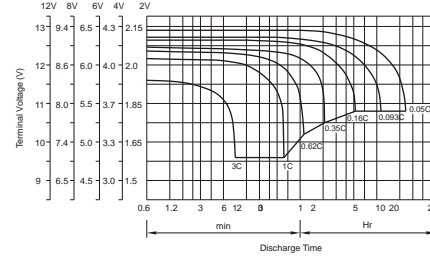

**Relationship between charging voltage and temperature**



**Self-discharge characteristic**




**Temperature effects on float life**



**Temperature effects on capacity**



**Life characteristics of Standby use**

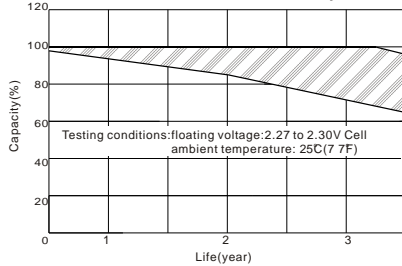

**Cycle service life in relation to depth of discharge**



**Constant Current Discharge Characteristics (Amperes, 25°C)**

**Constant Power Discharge Characteristics (Watts, 25°C)**

F.V/Time	Constant Current Discharge Characteristics (Amperes, 25°C)								Constant Power Discharge Characteristics (Watts, 25°C)							
	5min	10min	30min	1h	3h	5h	10h	20h	5min	10min	30min	1h	3h	5h	10h	20h
5.40V	30.10	28.60	13.20	7.50	3.20	2.10	1.20	0.60	190.30	126.00	53.50	32.40	17.10	11.30	6.36	3.65
5.25V	33.60	30.00	13.50	7.70	3.20	2.10	1.20	0.60	205.20	135.50	57.10	34.20	17.60	11.70	6.50	3.68
5.10V	38.40	30.40	13.90	7.90	3.30	2.20	1.20	0.60	220.90	145.00	60.80	36.00	18.00	12.20	6.56	3.70
4.80V	42.10	32.00	14.50	8.20	3.30	2.20	1.20	0.60	252.00	164.20	67.50	39.60	18.90	12.60	6.56	3.75

Packing Dimensions	391*243*164mm	Quantity Per Box	15 pcs	Net weight Per Box	21 kg	Gross weight Per Box	21.5 kg
Splint	Europe (1200*800mm)	Australia (1150*1100mm)	Standard (1100*950mm)	Nonstandard (1000*1150mm)			
20'RY 8.5'	11.88k		12.00k		11.52Kpcs		11.88pcs



**SHENZHEN CHIWAY BATTERY CO., LTD.**

Jingyi Industrial Zone, NO.528 Jinbi Road, Pingshan Town, Longgang District, Shenzhen, China.  
Tel: (+86-755) 8993 0038 8993 1028 Fax: (+86-755)8993 0306 E-mail : sales@chiway-battery.com

[www.chiway-battery.com](http://www.chiway-battery.com)