




● Outer dimensions (mm)

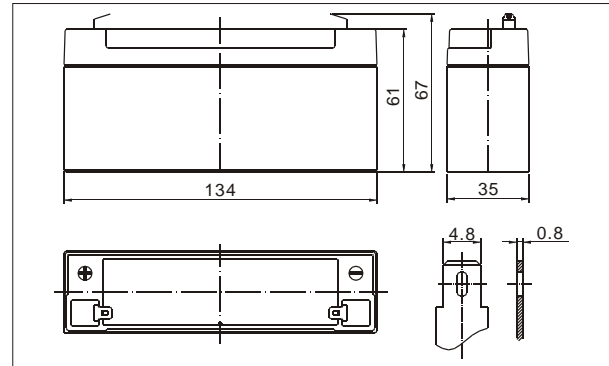

The CHIWAY sealed lead-acid rechargeable battery (VRLA battery) is leak-proof and maintenance free. The Superiority of VRLA battery is derived from its uniquely efficient oxygen recombination technology. The oxygen evolved from the positive plates diffuses through the micro porous glassfiber mat to the negative plates where it is changed back to water by recombination reaction, eliminating the need for water addition. The result is a maintenance free battery.

● Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

● General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

● Application


- Alarm System
- Medical Equipment
- Cable Television
- Control Equipment
- UPS
- Communication Equipment
- Toys
- Emergency power System
- Power Tools
- Security System

● Specifications


Nominal Voltage		6V
Capacity (20 hr 25°C)		3.3 Ah
Design Life		3-5 Years
Dimensions	Length	134mm (5.28inch)
	Width	35mm (1.38 inch)
	Height	61 mm (2.40inch)
	Total Height	67mm (2.64 inch)
Approx. Weight		0.71 Kg (1.57 lbs)
Capacity 25°C (77°F)	20 hr rate	3.30Ah
	10 hr rate	3.07Ah
	5 hr rate	2.81Ah
	1 hr rate	1.98Ah
Internal Resistance (Full charged Battery at 25°C (77°F))		30m Ω

Capacity affected by Temperature (20hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge at 25°C	3 month	Remaining capacity: 91%
	6 month	Remaining capacity: 82%
	12 month	Remaining capacity: 65%
Normal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range		-15°C ~ 50°C (5 ~ 122°F)
Float charging voltage (25°C)		6.80 to 6.90V
Cyclic charging voltage (25°C)		7.25 to 7.45V
Maximum charging current		1.32A
Terminal material		Copper
Maximum Discharge current		49.5A (5sec)


Charge characteristic Curve for standby use

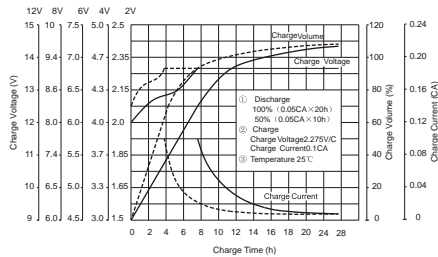


Discharge characteristic Curve

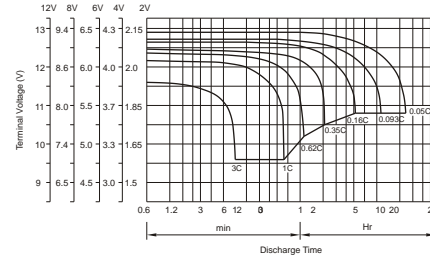

Relationship between charging voltage and temperature

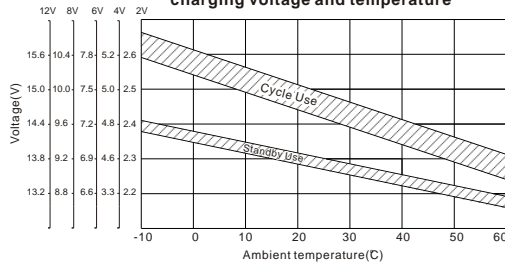

Self-discharge characteristic

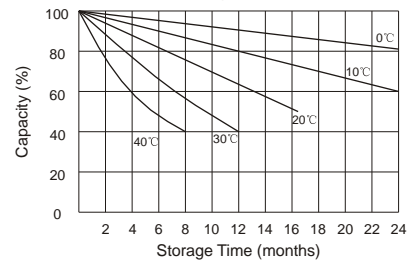


Temperature effects on float life




Temperature effects on capacity



Life characteristics of Standby use

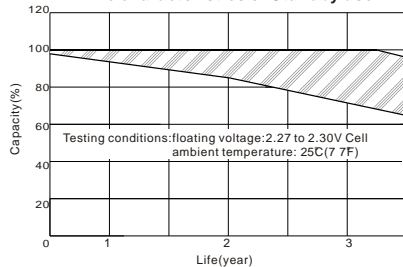

Cycle service life in relation to depth of discharge

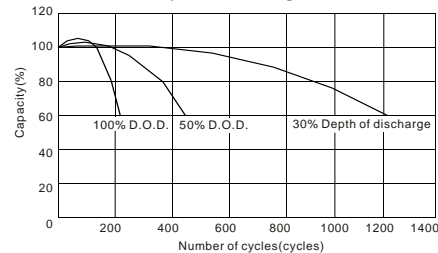

Constant Current Discharge Characteristics (Amperes, 25°C)

Constant Power Discharge Characteristics (Watts, 25°C)

F.V/Time	Constant Current Discharge Characteristics (Amperes, 25°C)									Constant Power Discharge Characteristics (Watts, 25°C)							
	5min	10min	30min	1h	3h	5h	10h	20h	5min	10min	30min	1h	3h	5h	10h	20h	
5.40V	8.28	7.87	3.63	2.06	0.88	0.58	0.33	0.17	52.33	34.65	14.71	8.91	4.70	3.11	1.75	1.00	
5.25V	9.24	8.25	3.71	2.12	0.88	0.58	0.33	0.17	56.43	37.26	15.70	9.41	4.84	3.22	1.79	1.01	
5.10V	10.56	8.36	3.82	2.17	0.91	0.61	0.33	0.17	60.75	39.88	16.72	9.90	4.95	3.36	1.80	1.02	
4.80V	11.58	8.80	3.99	2.26	0.91	0.61	0.33	0.17	69.30	45.16	18.56	10.89	5.20	3.47	1.80	1.03	

Packing Dimensions	295*249*91mm	Quantity Per Box	12 pcs	Net weight Per Box	8.4 kg	Gross weight Per Box	8.9 kg	
Splint	Europe (1200*800mm)	Australia (1150*1100mm)	Standard (1100*950mm)	Nonstandard (1050*1150mm)				
20'RY 8.5'	23.49k		24.240k		23.49k		24.240k	



SHENZHEN CHIWAY BATTERY CO., LTD.

Jingyi Industrial Zone, NO.528 Jinbi Road, Pingshan Town, Longgang District, Shenzhen, China.
Tel: (+86-755) 8993 0038 8993 1028 Fax: (+86-755)8993 0306 E-mail : sales@chiway-battery.com

www.chiway-battery.com